




Flair S12

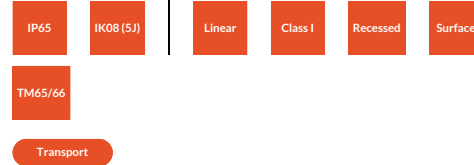

Flair S12 is a linear luminaire designed in accordance with fire precautions for subsurface rail stations (Section 12).

Standard Colours

Pure White

Matt Silver

Product Information

Flair S12's even lit appearance ensures a consistent light distribution, enhancing visibility and uniform illumination. Incorporating a removable gear tray ensures Flair S12 is quick and easy to maintain, whilst enabling sustainable technology upgrades.

Flair S12 complies with London Underground subsurface standard S1085 utilising low smoke, zero halogen cables and control gear.

Applications include ticket areas, station forecourts, general circulation areas, covered platforms and subways.

This luminaire is designed for longevity and sustainability and adheres to our circular design principles. We conduct a circular economy assessment using [TM66](#) and measure embodied carbon (kgCO₂e) in accordance with [TM65.2](#).

Impact Resistance Rating: IK08 (5J). [What is IK Rating?](#)

Ingress Protection Rating: IP65. [What is IP Rating?](#)

Housing: Extruded aluminium body with die cast end caps.

Paint: Polyester powder coat. [All Colour Options Available Here.](#)

Diffuser: Toughened frosted glass diffuser in frame secured with tamperproof screws.

Driver: Electronic control gear on removable tray for ease of repair/upgrade with fused plug & socket connector block.

Mounting: Ceiling.

Cable Entry: Provision for conduit entry in back.

Design Life: 30+ years. [What is Design Life?](#)

■ Technical Information

| FlairS12 | Output (Lum/m) | Load (W) | Efficacy (lm/W) | CCT (K) |
|-----------------------|-------------------------------|-------------------|--------------------------|---------------------------|
| L615mm Frosted | | | | |
| FLR-2-1500N-F-MS-ST | 957 | 15.5 | 62 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/m) | Nightlight Output (Lum/m) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-2000N-F-MS-ST | 1247 | 21 | 59 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/m) | Nightlight Output (Lum/m) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-2500N-F-MS-ST | 1523 | 26.7 | 57 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/m) | Nightlight Output (Lum/m) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-3000N-F-MS-ST | 1825 | 30.5 | 60 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/m) | Nightlight Output (Lum/m) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-1500W-F-MS-ST | 909 | 15.5 | 59 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/m) | Nightlight Output (Lum/m) |
| | 100,000 | D | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|-----------------------|-------------------------------|-------------------|---------------------------|----------------------------|
| L615mm Frosted | | | | |
| FLR-2-2000W-F-MS-ST | 1185 | 21 | 56 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-2500W-F-MS-ST | 1447 | 26.7 | 54 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-3000W-F-MS-ST | 1734 | 30.5 | 57 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| L615mm Clear | | | | |
| FLR-2-1500N-C-MS-ST | 1064 | 11.5 | 93 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L80B10>72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-2000N-C-MS-ST | 1421 | 15 | 95 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L80B10>72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|---------------------|-------------------------------|-------------------|---------------------------|--|
| L615mm Clear | | | | |
| FLR-2-2500N-C-MS-ST | 1779 | 18.7 | 95 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-3000N-C-MS-ST | 2234 | 23.6 | 95 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-1500W-C-MS-ST | 1011 | 11.5 | 88 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-2000W-C-MS-ST | 1350 | 15 | 90 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-2-2500W-C-MS-ST | 1690 | 18.7 | 90 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|------------------------|-------------------------------|-------------------|---------------------------|--|
| L615mm Clear | | | | |
| FLR-2-3000W-C-MS-ST | 2122 | 23.6 | 90 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 4.8 | CRI>80 | - | L ₈₀ B ₁₀₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | - | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| L1215mm Frosted | | | | |
| FLR-4-3000N-F-MS-ST | 1981 | 28.1 | 71 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₇₀ B ₁₀₀ >110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 553 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-4000N-F-MS-ST | 2602 | 38.6 | 67 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₇₀ B ₁₀₀ >110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 553 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-5000N-F-MS-ST | 3204 | 49.6 | 65 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₇₀ B ₁₀₀ >110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 553 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-6000N-F-MS-ST | 3566 | 57.8 | 62 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₇₀ B ₁₀₀ >110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 553 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|------------------------|-------------------------------|-------------------|---------------------------|----------------------------|
| L1215mm Frosted | | | | |
| FLR-4-3000W-F-MS-ST | 1882 | 28.1 | 67 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 525 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-4000W-F-MS-ST | 2472 | 38.6 | 64 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 525 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-5000W-F-MS-ST | 3044 | 49.6 | 61 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 525 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-6000W-F-MS-ST | 3388 | 57.8 | 59 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 525 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| L1215mm Clear | | | | |
| FLR-4-3000N-C-MS-ST | 2153 | 20.2 | 107 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L80B10>72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 600 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|----------------------|-------------------------------|-------------------|---------------------------|---|
| L1215mm Clear | | | | |
| FLR-4-4000N-C-MS-ST | 2888 | 27.2 | 106 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 600 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-5000N-C-MS-ST | 3692 | 34.8 | 106 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 600 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-6000N-C-MS-ST | 4778 | 45.6 | 105 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 600 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-3000W-C-MS-ST | 2045 | 20.2 | 101 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₇₀ B ₁₀ >100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 570 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-4000W-C-MS-ST | 2744 | 27.2 | 101 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L ₇₀ B ₁₀ >100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 570 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|------------------------|-------------------------------|-------------------|---------------------------|----------------------------|
| L1215mm Clear | | | | |
| FLR-4-5000W-C-MS-ST | 3507 | 34.8 | 101 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 570 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-4-6000W-C-MS-ST | 4539 | 45.6 | 100 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 8.7 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 570 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| L1515mm Frosted | | | | |
| FLR-5-3750N-F-MS-ST | 2655 | 33.8 | 78 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 526 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-5000N-F-MS-ST | 3541 | 47.3 | 75 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 526 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-6250N-F-MS-ST | 4318 | 61 | 71 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 526 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|------------------------|-------------------------------|-------------------|---------------------------|----------------------------|
| L1515mm Frosted | | | | |
| FLR-5-7500N-F-MS-ST | 4795 | 70.6 | 68 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>110,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 526 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-3750W-F-MS-ST | 2522 | 33.8 | 75 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 499 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-5000W-F-MS-ST | 3364 | 47.3 | 71 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 499 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-6250W-F-MS-ST | 4102 | 61 | 67 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 499 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-7500W-F-MS-ST | 4555 | 70.6 | 65 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L70B10>100,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | D | 499 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|----------------------|-------------------------------|-------------------|---------------------------|--|
| L1515mm Clear | | | | |
| FLR-5-3750N-C-MS-ST | 3549 | 31.3 | 113 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 670 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-5000N-C-MS-ST | 4535 | 40.2 | 113 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 670 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-6250N-C-MS-ST | 5525 | 49.8 | 111 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 670 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-7500N-C-MS-ST | 6591 | 61.6 | 107 | 4000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | B | 670 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-3750W-C-MS-ST | 3372 | 31.3 | 108 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 636 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

| FlairS12 | Output (Lum/lm) | Load (W) | Efficacy (lm/W) | CCT (K) |
|----------------------|--------------------------------------|--------------------------|----------------------------------|---|
| L1515mm Clear | | | | |
| FLR-5-5000W-C-M5-ST | 4308 | 40.2 | 107 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 636 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-6250W-C-M5-ST | 5249 | 49.8 | 105 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 636 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |
| FLR-5-7500W-C-M5-ST | 6261 | 61.6 | 102 | 3000 |
| | Weight (kg) | CRI | High Temp (°C) | LED Lifetime |
| | 10.5 | CRI>80 | - | L ₈₀ B ₁₀₀ >72,000h |
| | Driver lifetime (up to hours) | LED Energy Rating | Emergency Output (Lum/lm) | Nightlight Output (Lum/lm) |
| | 100,000 | C | 636 | - |
| | Dimensions | | | |
| | 150mm x 88mm | | | |

■ Fitting Options

| | |
|--|-----|
| Conduit Hole in One End | -1H |
| Fully Recessed | -R |
| Conduit Hole in Both Ends | -2H |
| Maintained Emergency 3 Hour, Self Test | -ES |
| Maintained Emergency 3 Hour, DALI | -ED |
| Maintained Emergency 3 Hour | -E3 |
| Pure White | -PW |
| Matt Silver | -MS |
| Switch Dimming | -DI |
| DALI-2 Dimming / Monitoring | -DA |

- For paint colour options, please replace -MS with required paint code.
- -E3 / -ES / -ED options not available on all 615mm versions.
- -R Recessed includes 20mm flange all round. For recess cut-out add 10mm to width and length shown.

