



## Flair Mini

IP65

IK09 (10J)

Linear

Class III

Recessed

Surface

Transport

Flair Mini is an S12 luminaire designed in accordance with fire precautions for subsurface rail stations (Section 12).

### Product Information

Flair Mini's opal diffuser provides a soft lit appearance, while providing uniform illumination, ensuring a consistent light distribution. Flair Mini complies with London Underground subsurface standard S1085 utilising low smoke, zero halogen cables and control gear. Applications include ticket areas, station forecourts, general circulation areas, covered platforms and subways.

**Impact Resistance Rating:** IK09 (10J). More information, [CLICK HERE](#).

**Ingress Protection Rating:** IP65. More information, [CLICK HERE](#).

**Housing:** Extruded aluminium body with aluminium end caps secured with tamperproof screws.

**Paint:** N/A. Clear anodised finish.

**Diffuser:** Toughened opal glass diffuser.

**Driver:** Remote 24V DC power supply required (supplied separately). Up to 11 metre continuous length possible from a single 24V power supply.

**Mounting:** Ceiling or wall.


**Cable Entry:** Via plug and socket (Supplied). Provision for mains cable entry in remote power supply.

■ **Technical Information**


FlairMini	Output (Lum/lm)	Load (W)	Efficacy (lm/W)	CCT (K)
FLM-277N	277	6.7	53	4000
	<b>Weight (kg)</b>	<b>CRI</b>	<b>High Temp (°C)</b>	<b>LED Lifetime</b>
	0.9	CRI>80	-	L70B50>50,000h
	<b>Driver lifetime (up to hours)</b>	<b>LED Energy Rating</b>	<b>Emergency Output (Lum/lm)</b>	<b>Nightlight Output (Lum/lm)</b>
	-	G	-	-
	<b>Dimensions</b>			
	500mm x 50mm x 40mm			
FLM-516N	516	11.6	52	4000
	<b>Weight (kg)</b>	<b>CRI</b>	<b>High Temp (°C)</b>	<b>LED Lifetime</b>
	0.9	CRI>80	-	L70B50>50,000h
	<b>Driver lifetime (up to hours)</b>	<b>LED Energy Rating</b>	<b>Emergency Output (Lum/lm)</b>	<b>Nightlight Output (Lum/lm)</b>
	-	G	-	-
	<b>Dimensions</b>			
	500mm x 50mm x 40mm			




**FLM-277N-FA-CM-SL**

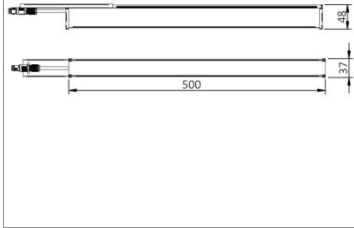


**FLM-277N-FE-B-1M**

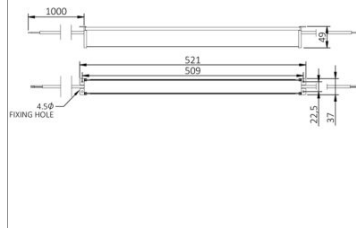


**FLM-277N-FE-E-1M**

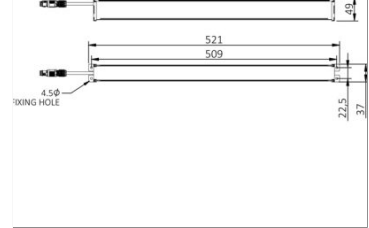

**FLM-277N-FS-B-1M**

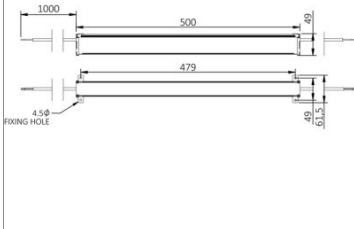

**FLM-277N-FS-E-1M**

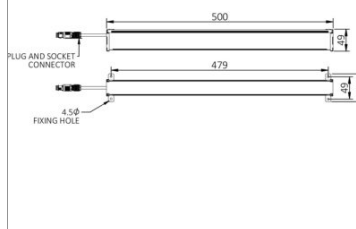

**FLM-277N-FA-CB-SL**

